

control system is shown in Fig. 17. The system has only weak tracking in the extremum regions of the reference input in which its derivative sign changes. Moreover, the control signal applied by the control system to the SMA actuator is shown in Fig. 18, and the absolute value of the rotation error over time is displayed in Fig. 19. The absolute error average for the proposed control system is 0.28 degree. It should be noted that this worth result is obtained by only training the Prandtl–Ishlinskii hysteresis model with the data of some first order reversal curves. It means that whether the generalized Prandtl–Ishlinskii model is trained by the first order reversal curves data or is trained by higher order minor loops data, the model has good prediction of the high order minor hysteresis loops of SMA actuator.

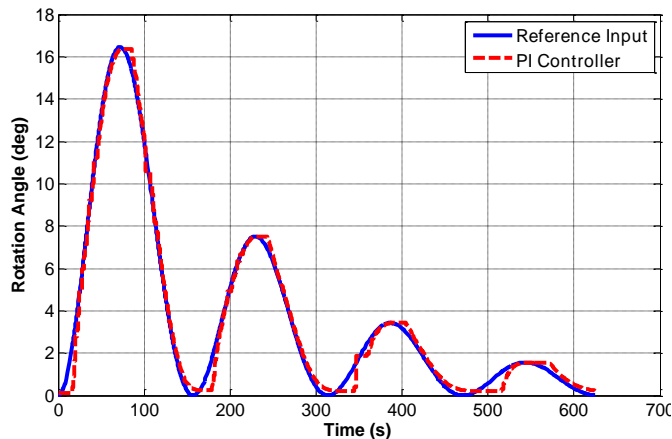


Fig. 16. Tracking control of a decaying sinusoidal wave.

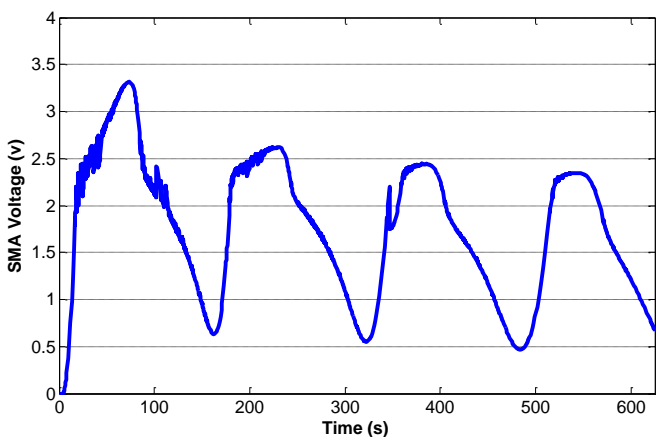


Fig. 17. SMA voltage during tracking control of a decaying sinusoidal wave.

I. CONCLUSION

In this paper, the generalized Prandtl–Ishlinskii model was used to model asymmetric nonlinear hysteresis behavior of Shape Memory Alloy (SMA) actuator. This model was used in a plant with a Proportional Integral (PI) controller to control a morphing wing mechanism actuated by SMA actuators. It was shown that the proposed control system has great capability in

tracking square and sinusoidal trajectories and leads to low tracking error. Although the proposed control system has simple structure, it can be used for other smart structures due to the results obtained in this study. Also, it can be easily implemented for online applications and leads to good tracking error for trajectory with hysteresis loops.

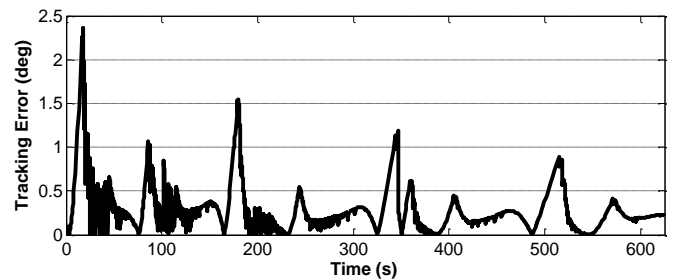


Fig. 18. Absolute of tracking error in tracking control of a decaying sinusoidal wave.

REFERENCES

- [1] Lee HJ, Lee JJ. "Time delay control of a shape memory alloy actuator" *Smart Materials and Structures*, 2004;13:227–39.
- [2] Webb G, Kurdila A, Lagoudas D. "Adaptive hysteresis model for model reference control with actuator hysteresis" *Journal of Guidance Control and Dynamics*, 2000; 23(3).
- [3] Ma N, Song G. "Control of shape memory alloy actuator using pulse width modulation" *Smart Materials and Structures* 2003;12:712–9.
- [4] Da Silva EP. "Beam shape feedback control by means of a shape memory actuator" *Materials and Design* 2007;28:1592–6.
- [5] Asua E, Etxebarria V, Garc'ia-Arribas "A. Micropositioning control using shape memory alloys" In: *Proceedings of IEEE conference on control applications CCA2006*, Munich, Germany; 2006. p. 3229–34.
- [6] F. Ikhouane and J. Rodellar, "A linear controller for hysteretic systems", *IEEE Transactions on Automatic Control*, vol. 51, no. 2, pp. 340-344, 2006.
- [7] S. Valadkhan, K. Morris, and A. Khajepour, "Robust PI control of hysteretic systems," *IEEE Conference on Decision and Control*, Cancun, Mexico, December 9-11, 2008, pp. 3787-3792.
- [8] M. Brokate and J. Sprekels, "Hysteresis and Phase Transitions", New York, Springer, 1996.
- [9] M. Al Janaideh, S. Rakheja, and C-Y Su, "A generalized Prandtl-Ishlinskii model for characterizing hysteresis nonlinearities of smart actuators," *Smart Materials and Structures*, vol. 18, no. 4, pp. 1-9, 2009.
- [10] H. Sayyaadi, M. R. Zakerzadeh, and M. A. V. Zanjani. "Accuracy evaluation of generalized Prandtl-Ishlinskii model in characterizing asymmetric saturated hysteresis nonlinearity behavior of shape memory alloy actuators." *International Journal of Research and Reviews in Mechatronic Design and Simulation (IJRRMDS)* 1, no. 3, 2011.
- [11] H. Basaeri, A. Yousefi-Koma, M. R. Zakerzadeh, and S. S. Mohtasebi, "Development of a Bio Inspired 2 DOF Morphing Wing Actuated by Shape Memory Alloy", *2nd International Conference on Manufacturing (Manufacturing 2014)*, Feb. 9-10, 2014. Singapore.
- [12] M. Novotny, J. Kilpi, "Shape Memory Alloys (SMA)", [online]. Available on: <http://www.ac.tut.fi/aci/courses/ACI-51106/pdf/SMA/SMA-introduction.pdf>.
- [13] Zakerzadeh, Mohammad R., and Hassan Sayyaadi. "Experimental comparison of some phenomenological hysteresis models in characterizing hysteresis behavior of shape memory alloy actuators." *Journal of intelligent material systems and structures*, 2012; 23(12) 1287–1309.