

Fig.11. show the result compare to [9] for Lena image

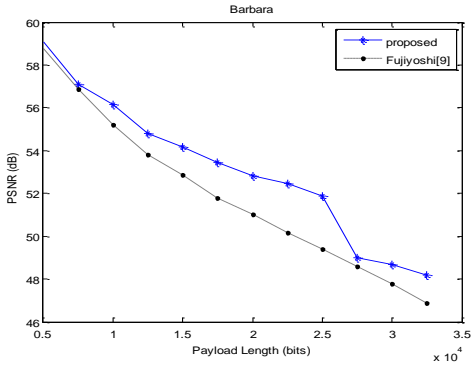


Fig.12. show the result compare to [9] for Barbara image

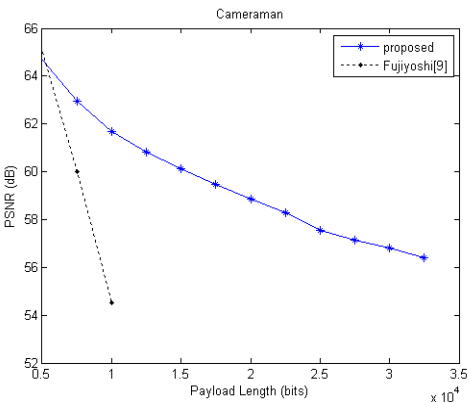


Fig.13. show the result compare to [9] for Cameraman image

V. CONCLUSIONS

In this paper, we have proposed a reversible watermarking method without using a location map to solve overflow and underflow problems during embedding process and extracting process. The concept is to find predicted threshold value and histogram shifting scheme exploit the predicted threshold to embedding data. We find a relationship between predicted threshold value and prediction error. This feature helps us achieve the paper goal of location map free watermarking

method with better image quality. Capacity control achieves better image quality with different payload length that other location free method is failed to do. The image capacity and quality are great improved in the location map free scheme.

ACKNOWLEDGEMENT

This paper is the partial result of project NSC100-2632-E-366-001-MY3. We would like to thank the supporting of Ministry of Science and Technology, R.O.C., also thank the value advices of Miss Yu-Hsiu Huang and Prof. Chun-Hung Richard Lin.

References

- [1] Jun Tian, "Reversible data embedding using a difference expansion," IEEE Trans. Circuits Syst. Video Technol., vol.13, pp.890-896, Aug. 2003.
- [2] A.M. Alattar, "Reversible watermark using difference expansion of triplets," in Proc. Int. Conf. Image Process., vol. 1. Barcelona, Spain, 2003, pp. 501-504
- [3] A.M. Alattar, "Reversible watermark using the difference expansion of a generalized integer transform," IEEE Trans. Image Process., vol. 13, no. 8, pp. 1147-1156, Aug. 2004.
- [4] Z. Ni, Y. Q. Shi, N. Ansari, and S. Wei, "Reversible data hiding," IEEE Trans. Circuits Syst. Video Technol., vol. 16, no. 3, pp. 354-362, 2006.
- [5] M. Fallahpour, D. Megias, M. Ghanbari, "Reversible and high-capacity data hiding in medical images" IET Image Process., 2011, Vol.5, Iss. 2, pp. 190-197
- [6] D. M. Thodi and J. J. Rodriguez, "Expansion embedding techniques for reversible watermarking," IEEE Trans. Image Process., vol. 16, no. 3, pp. 721-730, Mar. 2007.
- [7] V. Sachnev, H. J. Kim, J. Nam, S. Suresh, and Y. Q. Shi, "Reversible watermarking algorithm using sorting and prediction," IEEE Trans. Circuits Syst. Video Technol., vol. 19, no. 7, pp. 989-999, Jul. 2009.
- [8] M. Fujiyoshi, S. Sato, H.L. Jin, and H. Kiya, "A location-map free reversible data hiding method using block-based single parameter," in Proc. IEEE ICIP, 2007, pp.257-260.
- [9] M. Fujiyoshi, TSUNETYO, and h. Kiya, "A reversible data hiding method free from location map and parameter memorization," in Proc. IEEE ICIP, pp. 978-1-4244-7010-5/10, 2010.
- [10] Shyh-Yih Wang, Chun-Yi Li and Wen-Chung Kuo, "Reversible data hiding based on two-dimensional prediction errors" IET Image Process., 2013, Vol. 7, Iss. 9, pp.805-816 doi:10.1049/iet-ipr.2012.0521
- [11] R. Naskar, R.S. Chakraborty, "Reversible watermarking utilising weighted median-based prediction" IET Image Process., 2012, Vol. 6, Iss. 5, pp. 507-520 doi: 10.1049/iet-ipr.2011.0244
- [12] Lee, C.F., Chen, H.L., and Tso H.K., "Embedding capacity raising in reversible data hiding based on prediction of difference expansion" The Journal of Systems and Software 83, pp. 1864-1872, 2010.
- [13] L. H. J. Kamstra and A.M. Heijmans, "Reversible data embedding into images using wavelet techniques and sorting," IEEE Trans. Image Process., vol. 14, no. 12, pp. 2082-2090, Dec. 2005.
- [14] Chang, C.C., Pai, P.Y., Yeh, C.M., Chan, Y.K. ' A high payload frequency-based reversible image hiding method ', Inf. Sci., 2010, 180, (11), pp. 2286 – 2298